CHARGE PORT CLEANER

APPLICATION INSTRUCTIONS

MOC PRODUCTS

PLEASE READ BEFORE USE: ***1. READ THE LABEL :*** ALWAYS READ AND FOLLOW THE INSTRUCTIONS ON THE PRODUCT LABEL CAREFULLY BEFORE USE. THIS INCLUDES INFORMATION ON USAGE, SAFETY PRECAUTIONS, AND PROPER DISPOSAL. ***CAUTION: WEAR RUBBER INSULATED GLOVES CERTIFIED FOR USE ON ELECTRIC VEHICLES AND APPROVED SAFETY GLASSES DURING THE APPLICATION PROCESS.*** DO NOT SPRAY DIRECTLY ON PAINTED SURFACES. FOR BEST RESULTS, VEHICLE SHOULD BE IN DRY, DUST-FREE LOCATION, OUT OF DIRECT SUNLIGHT. ONLY PERFORM CLEANING IN WELL-VENTILATED AREA, WITH THE VEHICLE POWERED OFF, AND IN THE "PARK" POSITION. THIS CLEANING SHOULD ONLY BE PERFORMED BY QUALIFIED MECHANICS WHO HAVE FAMILIARITY WITH ELECTRIC VEHICLE MAINTENANCE. ***WARNING: USE ONLY MOC APPROVED LOW TORQUE CORDLESS CLEANING TOOL (#71371) WITH BRUSH ADAPTORS, HIGH SPEED TOOLS ARE NOT RECOMMENDED DUE TO POTENTIAL SAFETY HAZARDS.***

01 ***FOR CHARGE PORT (ON VEHICLE) :*** Remove or open charge port cover and inspect for any surface or other damage before starting any cleaning.

02 Spray small burst of product into charge port terminals.

03 Insert the Charge Port Cleaning Nylon Brush Adaptor ***(#71372)*** into the port hole. Some vehicles may require the use of the Pin Adaptor Brush ***(#71373)*** on charge port terminals.

04 Allow the brush head to rotate for 15 to 20 seconds. Repeat in each port hole.

05 After cleaning with tool, respray ports to remove any residual contaminants.

06 Allow product to dry completely, low pressure compressed air may be blown into the ports to assist with the drying process.

07 ***FOR CHARGE CABLE :*** Important: De-energize and disconnect charge cable from power source. Remove protective cover or boot, if equipped.

08 Inspect for any surface or other damage before starting any cleaning.

09 Spray small burst of product into charge cable terminals.

10 Insert the Charge Cable Cleaning Pin Adaptor ***(#71373)*** into the charge cable terminals. Some charge cables may require the use of the Brush Adaptor ***(#71372)*** on cable terminals.

11 Allow the head to rotate for 15 to 20 seconds. Repeat for each terminal.

12 After cleaning with tool, respray terminals to remove any residual contaminants.

13 Allow product to dry completely, low pressure compressed air may be blown into the ports to assist with the drying process.

CHARGE PORT CLEANER

MOC PRODUCTS

PRODUCT INFORMATION

A non-flammable cleaner specifically formulated to ensure the optimal performance of electric and hybrid vehicle charge ports and charging cables. ***MP® Charge Port Cleaner's*** powerful cleaning agents quickly break down and remove dirt, dust, and grime that can impede charging efficiency. This service can ensure optimal connection of the power contacts to promote a more efficient battery recharge.

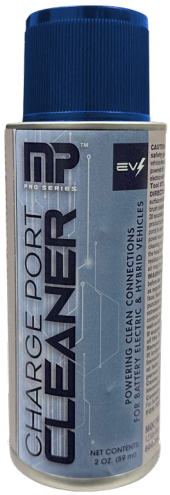

PART #10971

PART #71371

PART #71372

PART #71373

VEHICLE CHARGE PORT

CLICK OR SCAN FOR INSTALLATION DEMO

VEHICLE CHARGE CABLE